



Serie


F



TREVIBENNE S.p.A.
Via A. Volta, 5
36025 Noventa Vic.na
Vicenza (VI) - Italy
Tel. +39 0444 760773
Fax +39 0444 861182
www.trevibenne.it
info@trevibenne.it



Azienda certificata
Cert. N° 501005936
UNI EN ISO 9001:2000

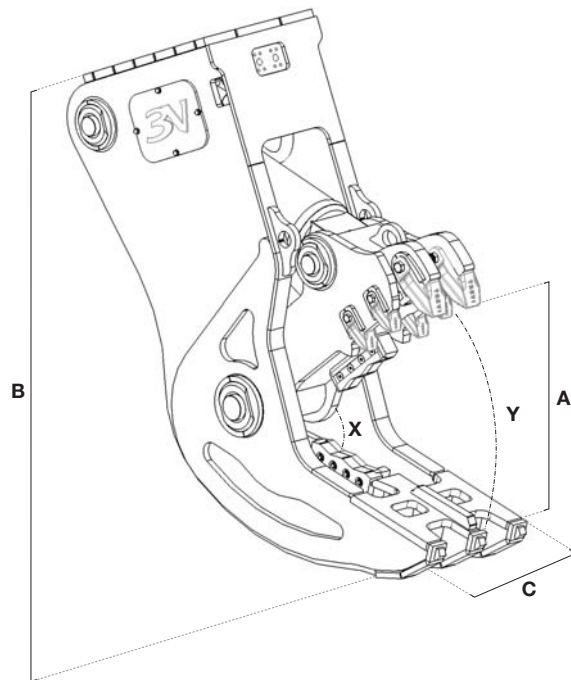

		F 07	F 12RD*	F 18RD*	F 20RRD*	F 25RD*	F 30RD*	F 70RD*
(1)	t.	6 : 10	13 : 17	18 : 25	23 : 28	25 : 32	33 : 45	65 : 85
**	kg.	550	1190	1910	2310	2490	3070	6430
A	mm.	475	690	810	810	870	950	1250
B	mm.	1330	1740	1850	2230	1955	2100	2670
C	mm.	330	420	470	470	570	650	800
	mm.	140	220	260	260	260	260	325
X	t.	70	150	200	200	235	275	415
Y	t.	25	65	80	80	95	105	170
	t.	45	100	125	125	155	170	280
	bar	250	310	310	310	310	310	340
	l/min.	40 / 60	120 / 200	200 / 300	200 / 300	250 / 350	300 / 400	450 / 600
		/	/	/		/	/	/
max	bar	/	/	/	140	/	/	/
max	l/min.	/	/	/	10	/	/	/
∅ max	mm.	20	30	40	40	40	50	75

(*) MODELLO FORNITO CON DENTI INTERCAMBIABILI IMBULLONATI. (*) BOLTED INTERCHANGEABLE TEETH VERSION PROVIDED.

(*) MODÈLE FOURNIE AVEC LES DENTS INTERCHANGEABLES BOULONNÉS. (*) MODELO PROVISTO CON LOS DIENTES INTERCAMBIABLES ATORNILLADOS.

(**) I PESI SOPRA DESCRITTI NON INCLUDONO LA SELLA ATTACCO. CARATTERISTICHE DI PRODOTTO E SPECIFICHE POSSONO VARIARE SENZA OBBLIGO DI PREAVVISO.

(**) THE ABOVE MENTIONED WEIGHTS DO NOT INCLUDE THE EXCAVATOR ATTACHMENT. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

(**) LOS PESOS INDICADOS NO COMPRENEN EL ENGANCHE EXCAVADORA. LAS CARACTERÍSTICAS DEL PRODUCTO Y LAS ESPECIFICACIONES PUEDEN VARIAR SIN OBLIGACIÓN DE PREAVISO.

(**) LES POIDS INDIQUÉS NE COMPRENNENT PASS L'ATTACHE POUR LA PELLE. LES CARACTÉRISTIQUES ET LES SPÉCIFICATIONS DES PRODUITS PEUVENT ÊTRE MODIFIÉES SANS PRÉVIS.

(1) ACCOPPIAMENTO ESCAVATORE-ATTREZZATURA CONSIGLIATO. (1) EXCAVATOR-EQUIPMENT RECOMMENDED COMBINATION.

(1) ACOPLAMIENTO EXCAVADORA-IMPLEMENTO ACONSEJADO. (1) COUPLAGE PELLE-EQUIPEMENT RECOMMANDÉ.